



HN-F AIR FILTER

- Features large reusable edge type filter element
- Most effective at removing water, oil, contamination
- 5 Micron filtration
- Air Inlet 1/2" F.P.T.
- Two Air Outlets 3/8" F.P.T.
- L:10cm x W:12cm x H:30cm

FILTER CAPACITY 120 CFM



HN-1 AIR CONTROL UNIT

- One Regulator with 160 lb. Inverted Gauge and Air Cocks
- Additional regulated outlets included
- Filtered main line outlet included
- Air Inlet 1/2" F.P.T.
- L:10cm x W:25cm x H:30cm

FILTER CAPACITY 120 CFM

REGULATOR CAPACITY 50 CFM



HN-2 AIR CONTROL UNIT

- One Regulator with 160 lb. Inverted Gauge and Air Cocks
- Two regulated outlets
- One filtered main line outlet with 200 lb. gauge
- Filtered main line outlet included
- Air Inlet 1/2" F.P.T.
- L:16cm x W:25cm x H:37cm

FILTER CAPACITY 120 CFM

REGULATOR CAPACITY 50 CFM



HN-3 AIR CONTROL UNIT

- Two Regulator with 160 lb. Gauge and Air Cocks
- Two regulated outlets
- Two additional regulated outlet included
- One filtered main line outlet with 200 lb. Gauge
- Air Inlet 1/2" F.P.T.
- L:27cm x W:18cm x H:39cm

FILTER CAPACITY 120 CFM

REGULATOR CAPACITY 50 CFM



SA-1 AIR FILTER

- Features REUSABLE edge type filter element
- Highly effective at removing water, oil, contamination
- 5 Micron filtration
- Air Inlet 1/2" N.P.T.

FILTER CAPACITY 50 CFM



SA-3 AIR CONTROL UNIT

- Reguator with 160 Ib. Inverted Gauge and Air Cock
- Additional regulated outlets included
- Filtered main line outlet included
- Air Inlet 1/2" F.P.T.
- Shipping Wt 8 lbs

FILTER CAPACITY 50 CFM

REGULATOR CAPACITY 40 CFM



AIR OPERATED UNDERCOATING GUN

CG-1

- Screw can of undercoating or sound deadener to gun
- Set air pressure not to exceed 40 P.S.I
- Attach air hose to base of gun handle
- Spray material according to thickness and width you desire (see note)
- After use be sure to clean the gun, can attachment area and pick-up tube



European
Spec.




U.S.
Spec.

CG-H Hose Curving



Three types of nozzles



ENGINE CLEANING GUN



CG-A



AIR DEADENING GUN

DG

- Suction feed spray gun with internal mixing
- Alu-reservoir 1 litre.
- Suitable for applying sound-deadening paints and dense materials.
- Adjustable nozzle
- Weight 900 gm. Air consumption 256 litre at 5 bar.
- Air connection 1/4" BSP.

AUTOMATIC SPRAY GUN COLOR CHANGE

LG



SANDBLASTER GUN



BL-A



2-LITER PRESSURE CUP

SP-L1

- For use with any pressure feed spraygun when more than one-quart of material is desired
- Wide mouth for easy clean-up
- Pressure Regulator allows for fluid pressure adjustments(0-50 PSI)
- Air Inlet 1/4" N.P.S.M
- Air Outlet 1/4" N.P.S.M
- Fluid out let 3/8" N.P.S.M



SP

SP-L2

- For use with any pressure feed spraygun when more than one-quart of material is desired
- Wide mouth for easy clean-up
- Pressure Regulator allows for fluid pressure
- Small, lightweight unit attaches to any spray gun (including HVLP) for accurate air pressure regulation
- A true diaphragm regulator
- Push-pull lock pressure setting
- Easy to read 0-160 PSI Gauge
- Capacity 22 CFM adjustments(0-50 PSI)
- Air Inlet 1/4" N.P.S.M
- Air Outlet 1/4" N.P.S.M
- Fluid out let 3/8" N.P.S.M





HAND SANDERS



SH-17T

Sandpaper Size 2-3/4"*17"

Base Length..... 15-3/4"

4m/m Thickness EVA



SH-11T

Sandpaper Size 2-3/4"*11"

Base Length..... 9-1/2"

4m/m Thickness EVA



SH-8T

Sandpaper Size 2-3/4"*8"

Base Length..... 6-3/4"

4m/m Thickness EVA



SH-17TN

Sandpaper Size 2-3/4"*17"

Base Length..... 15-3/4"

4m/m Thickness EVA

Easy Clip

SH-11TN

Sandpaper Size 2-3/4"*11"

Base Length..... 9-1/2"

4m/m Thickness EVA

Easy Clip



SH-8TN

Sandpaper Size 2-3/4"*8"

Base Length..... 6-3/4"

4m/m Thickness EVA

Easy Clip





HAND SANDERS

(Celluloid paint)



SH-11C

Sandpaper Size 2-3/4"*11"
Base Length..... 9-1/2"
Painted surface handle
4m/m Thickness EVA
Easy Clip



SH-17C

Sandpaper Size 2-3/4"*17"
Base Length..... 15-3/4"
Painted surface handle
4m/m Thickness EVA
Easy Clip



SH-8C

Sandpaper Size 2-3/4"*8"
Base Length..... 6-3/4"
Painted surface handle
4m/m Thickness EVA
Easy Clip



SH-11CN

Sandpaper Size 2-3/4"*11"
Base Length..... 9-1/2"
Painted surface handle
4m/m Thickness EVA
Easy Clip



SH-8P

Sandpaper Size 2-3/4"*8"
Base Length..... 6-3/4"
Painted surface handle
Touch Fastener



SH-17P

Sandpaper Size 2-3/4"*17"
Base Length..... 15-3/4"
Painted surface handle
Touch Fastener



SH-11P

Sandpaper Size 2-3/4"*11"
Base Length..... 9-1/2"
Painted surface handle
Touch Fastener



SANDERS

PLASTIC SANDING BOARD



HN-17

Sandpaper Size 2-3/4" * 17"

Base Length..... 15-3/4"

4m/m Thickness EVA

Easy Clip

SB

Sandpaper Size 4-1/4" * 10"

Base Length..... 8-1/2"

Material: ABS

4m/m Thickness EVA



HIGH NOON



WATER SEPARATOR



S-62



ST-62

- Removes Uiland Water
- Very Minor Pressure Reduction in Line
- Attaches Easily Between Gun and Line
- 10 Micron filtration
- Size:85x40 mm
- Air Inlet 1/4" M.P.T
- Air Outlet 1/4"M.P.T

SPRAY GUN FILTER

DISPOSABLE SPRAY GUN FILTER



S-53



S-72



(JAR OF 20)

- Disposable filter removes contaminates Such as moisture and oil that condense In the air hose between wall Mounted filter and your spray gun
- Redues paint defects
- Easy installation
- The product color has the white and red



MINI-REGULATOR



PR-4A

NOMINAL SIZE: 1-1/2" (40MM)



PR-4

NOMINAL SIZE: 1-1/2" (40MM)



PR-BG

NOMINAL SIZE: 1-1/4" (30MM)

- Small, lightweight unit attaches to any spray gun (including HVLP) air pressure regulation
- A true diaphragm regulator
- Push-pull lock pressure setting
- Easy to read 0-160 PSI Gauge



PR-4S

NOMINAL SIZE: 1-1/4" (30MM)



PR-S12

NOMINAL SIZE: 1-1/2" (40MM)

all plastic body regulator

AIR REGULATOR



AR-2

NOMINAL SIZE: 2" (53MM)



AR-BK

NOMINAL SIZE: 2" (53MM)



AIR ADJUSTING VALVE



SE-4

**NOMINAL SIZE: 1-1/2" (40MM)
1-1/4" (30MM)**

- Includes pressure gauge that reads up to 160 PSI
- Fits all leading spray guns
- Can be used on HVLP spray guns
- Air Inlet 1/4" N.P.T
- Air Outlet 1/4" F.P.T (Swivel Nut)



HN-V

**NOMINAL SIZE: 1-1/2" (40MM)
1-1/4" (30MM)**

- Small, lightweight unit attaches to any HVLP spray gun for precise air pressure setting at the gun
- Easy to read 0-160 PSI Gauge
- Air Inlet 1/4" N.P.T
- Air Outlet 1/4" F.P.T (Swivel Nut)



HN-L4

**NOMINAL SIZE: 1-1/2" (40MM)
1-1/4" (30MM)**

- Designed especially for HVLP spray guns
- Includes pressure gauge that reads up to 160 PSI
- Air Inlet 1/4" N.P.T
- Air Outlet 1/4" F.P.T (Swivel Nut)



SD-4

**NOMINAL SIZE: 1-1/2" (40MM)
1-1/4" (30MM)**

- Includes pressure gauge that reads up to 160 PSI
- Fits all leading spray guns
- Can be used on HVLP spray guns
- Air Inlet 1/4" N.P.T
- Air Outlet 1/4" F.P.T (Swivel Nut)



SE-3

- Precision tapered valve
- Full open to close with approximately 4 turns
- Infinitely adjustable
- Large, easy to handle knob
- Air Inlet 1/4" N.P.T
- Air Outlet 1/4" F.P.T (Swivel Nut)



SL-4

**NOMINAL SIZE: 1-1/2" (40MM)
1-1/4" (30MM)**

- Includes pressure gauge that reads up to 160 PSI
- Fits all leading spray guns
- Air Inlet 1/4" N.P.T
- Air Outlet 1/4" F.P.T (Swivel Nut)



Filter / Regulator

Port Threads: 1/4" 3/8" 1/2"

Flow at 100PSI, 80PSI secondary, 10PSI pressure drop.

Compact and efficient, these units combine all performance features of a standard filter and regulator in a single attractive package.

Body-Zinc die casting

May replace digital gauge



F/R-L (Lubricators)

Port Threads: 1/4" 3/8" 1/2"

Flow at 100PSI, 80PSI secondary, 10PSI pressure drop.

Complete F/R and L units in package.

May replace digital gauge



F-R-L

Port Threads: 1/4" 3/8" 1/2"

Complete air preparation units in package.

Max supply pressure = 160PSI

Max temp. = 150°F

May replace digital gauge



Regulators

Flow at 100PSI inlet, 80PSI secondary, 10PSI pressure drop.

Lubricators

Flow at 100PSI inlet, 5PSI pressure drop.

Filters

Flow at 100PSI inlet, 5PSI pressure drop.

Port Threads: 1/4" 3/8" 1/2"



MINI Lubricator

Port Threads: 1/4"

Flow at 100PSI inlet, 5PSI pressure drop.

Designed for limited space applications.

All of the oil seen through the sight dome is delivered downstream as mist from.

Once set, the lubricator automatically compensates for change in air flow.

DIGITAL GAUGE



PR-BG1



PR-4SG1



HN-G1

3 units selectable: PSI , BAR , Kpa
Nominal Size: 1-1/4(30mm)



PR-4G1

- Proof pressure : 200 PSI
- Burst pressure : 250 PSI (5 SEC)
- Accuracy : ± 1.2 PSI ± 1 digit @ 25oC
- Media : clean air or non-corrosive gases
- Display : LCD size : 11.0 x 21.0 mm
- Battery : 1.5V DC x 2, non changeable
- Battery life : 3 yrs (working 1 hour/day) ; 2,500 hrs (continue working)
- User interface : On/Off and change unit
- Operating temperature : 0 ~ 45 oC (32 ~ 115 oF)
- Storage temperature : -10 ~ 60 oC (14 ~ 140 oF)
- Face label : Toluene be able to wipe,
- HN-G1 digital pressure gauge : IP63
- Auto-off time set : 90 (SEC)
- Pressure port : brass 1/8" NPT male



HN-L4G1



HN-VG1




SE-4G1



SD-4G1



Wind Shield Holder Set Of 2Pcs

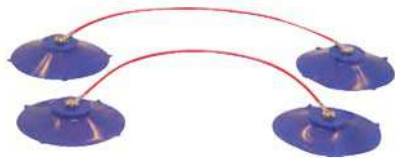

HN-88

Mini Sucker Clamp



HN-853

Aluminum Air Regulator



SL-3

Plastic Spreaders



PS-3

Set Contents:

1PC-6"(152mm)x3-1/2"(88.9mm)

1PC-5"(125mm)x3"(76mm)

1PC-4"(101mm)x3"(76mm)

Material:P.E.

Tubing Cutter



HN-TC

EASY

MINI OILER



S-63

Air Quick Couple



HN-SW

SWIVEL FITTING

U.S./EURO/JAP Type.

L52mm x W16mm

Air In:1/4" Male Connector

Air Out:1/4"G Male Thread

○ The lubricator Feeds The Oil Directly Into The Air Line So As To Lubricate Your Tools And Cylinders And Protect Them Against Rust

○ Air Inlet 1/4" M.P.T

○ Air Outlet 1/4"M.P.T

○ Size:85x40 mm

○ 20cc Capacity

○ Unbreakable Material:Acctate

AIR NOZZLE

AIR IN:1/4"x19(PS)

MATERIAL:PC

AIR MAX:100PSI

L90.5mm x W46.5mm x H15.5mm



HN-AN1

**U.S./EURO/JAP SPEC.
Coupler (Optional)**



HN-AN1a

Air Regulator Type

AIR IN:1/4"x19(PS)

L140mm x W46.5mm x H19.5mm



HN-AN1c

Air Regulator Type

AIR IN:1/4"x19(PS)



HN-AN1b

Air Regulator Gauge Type

AIR IN:1/4"x19(PS)

L140mm x W46.5mm x H56mm



AIR IN:1/4"x19(PS)

MATERIAL:PC

AIR MAX:100PSI

L90.5mm x W46.5mm x H15.5mm

(Length Without Brush)



**R.O.C. Patent
M547430**

**Germany Patent
202018102997**

**Patents In The U.S.
Are In The Making.**

**U.S./EURO/JAP SPEC.
Coupler (Optional)**



HN-AN2S
Short Brush



HN-AN2L
Long Brush



HN-AN2L-a
Long Brush
Air Regulator Type
HN-AN2S-a
Short Brush
Air Regulator Type

AIR IN:1/4"x19(PS)

L140mm x W46.5mm x H19.5mm

HN-AN2L-b
Long Brush
Air Regulator Gauge Type

HN-AN2S-b
Short Brush
Air Regulator Gauge Type



L140mm x W46.5mm x H56mm



HN-AN2L-c
Long Brush
Air Regulator Type

HN-AN2S-c
Short Brush
Air Regulator Type